

IF IT WERE ANY EASIER, IT WOULD WINTERIZE ITSELF.



Eliminate difficult or missed service calls with the Woodford Model 32 lawn sprinkler supply valve with outside access.

The Woodford Model 32 provides outside access to the water supply for easy start-up, winterizing and service. Key-operated with a removable drain plug, it's also perfect for ponds and other outside water needs. And since everything is right there on the unit, there's no need for the serviceman to enter the basement or crawl space. Recommend the Model 32 on your next job. It blows other sprinkler supply valves out of the water.

- Easily removable drain plug allows servicing at any time
- Freezeless* security, key-operated for tamper-resistant protection
- Interfaces with any reduced pressure backflow preventer, double check or pressure vacuum breaker
- 3/4" or Optional 1" inlets/outlets offered
- Can be retrofitted to existing homes and adapted to varying wall thicknesses

It doesn't get any easier than Woodford. Contact your wholesaler or local rep today.

*When properly winterized.



The choice of professionals.

Woodford Manufacturing Company, LLC

2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032


To view our complete product line visit: www.woodfordmfg.com or email: sales@woodfordmfg.com





MODEL 32

lawn sprinkler supply valve

FEATURES:


- IAPMO Listed 
- Inlet and pipe casing fits through a 1-7/8" hole
- Head casting fits flush against wall
- Allows for convenient scheduling by servicing contractors for start-up, servicing, or winterization of lawn sprinkler system without entering the home
- Key operated for tamper resistant protection
- Rough brass exterior finish
- Hardened stainless steel valve stem
- Solid brass operating rod
- 1" Galvanized steel pipe casing
- Red brass castings
- 2 Inlet options:
 - P Inlet: Combination 3/4" FPT & 1" MPT
 - C Inlet: 3/4" copper sweat valve body
- 3/4" NPT union outlet connection provided
- 1" NPT union outlet **optional** - add feature -1IN when ordering
- 1/4" NPT Socket Head manual drain plug
- Max Pressure: 125 p.s.i.
- Max Temperature: 120° F

FLOW RATE & PRESSURE LOSS

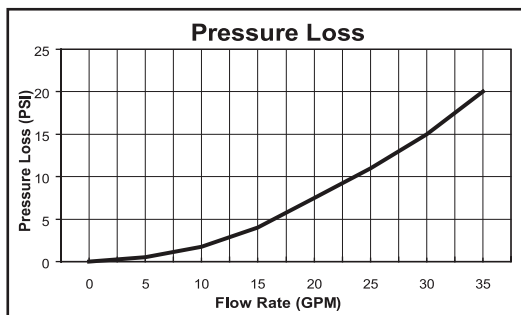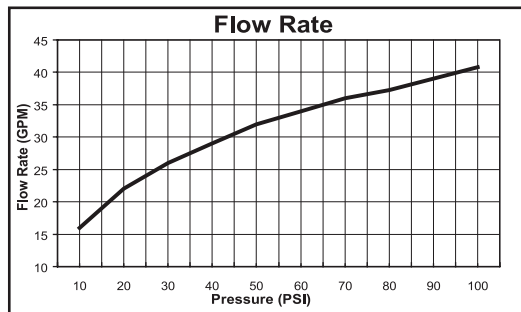


TYPICAL INSTALLATION

Installer: Please refer to local plumbing code for area installation requirements.

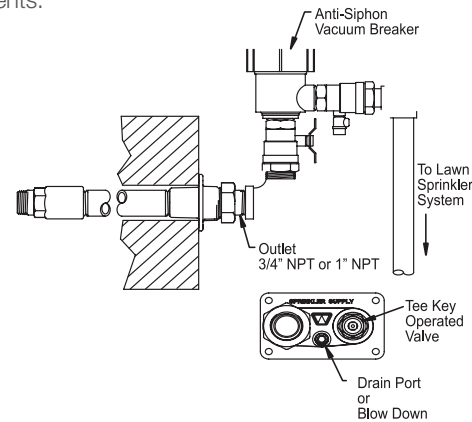

ROUGH-IN DIMENSIONS

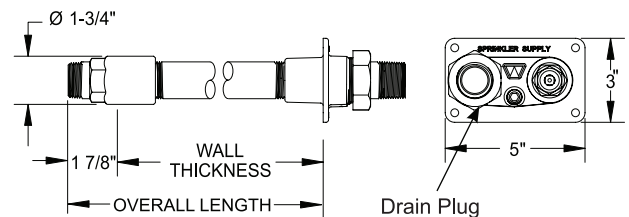

P Inlet: Combination 3/4" FPT & 1" MPT VB

C Inlet: 3/4" Copper Sweat VB

Outlet: 3/4" NPT or 1" NPT

Installation Requires Downward Pitch For Draining.

Wall Thickness	Overall Length	Shipping Wt. (Lbs)
4	5 7/8"	4.5
6	7 7/8"	4.8
8	9 7/8"	5.2
10	11 7/8"	5.5
12	13 7/8"	5.9
14	15 7/8"	6.2
16	17 7/8"	6.6
18	19 7/8"	6.9
20	21 7/8"	7.3
22	23 7/8"	7.6
24	25 7/8"	8.0

For more information contact

Woodford Manufacturing Company, LLC

2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032

To view our complete product line visit: www.woodfordmfg.com or email: sales@woodfordmfg.com

