


Residential Wall Faucets:	_
Inlet Descriptions & Rough-In Dimensions	2
Mounting Sleeve, Stem Lock	3
Over Sized Flange, Drywall Mounting Plate	4
Adjustable Operating Rod	4 5
Residential Wall Faucets-Automatic Draining:	_
Inlets, Model 25, 27.	5
Model 30, WF-30MS Mounting Sleeve, MB30BX Modular Box System,	
RK-30MBDR Doors, RK-Bracket	6
Commercial Wall Hydrants:	
Model 65, 67 B65/B67 Rectangular Brass Box	
RB65/RB67 Round Brass Box,	
MB65/MB67 Modular Box 68 Undercover Wall Hydrant TM	7
Hot & Cold: HC67, HCB67, C22, B22,	. /
SL-65 Stem Lock,70, Inlets	8
Rough-In Dimensions Commercial Roof Hydrants:	9
RHY1-MS & RHY2-MS	
RHMC-MS (Mild Climate), SRH-MS (Sanitary)	10
Package part Numbers, Rough-In Dimensions	11
Mild Climate Series: 101, 122, V122, 30CC, MB221, 224, 226	
C22CC, B22CC	12
21, 24, 26, B24, B26, SL-24 Stem Lock MB24 Modular Box, B24-B26	13
74, 75, 76, 79, 84, 86, B74-B79, RB74-RB79	
Closed Couple Rough-In Dimensions	14 15
Yard Hydrants:	13
Y34, Y1, Y2, R34, W34, X34, Y30, Y95	16
Utility Hydrants & Inlets & Rough-In Dims	17
Sanitary Yard Hydrants: S3, S4, Thermaline, H34	18
Vacuum Breakers, Backflow Preventers	19
Packaged Repair Kits	19-24
Obsolete PartsIndividual Parts	25 26
Terms & Conditions Of Sale	27
Sales Representatives	28
Rough-In Dimensions / O.A.L.	
OVERALL LENGTH SEE INLET — WALL THICKNESS — DESCRIPTIONS	
Model 14, 16, 17, 1	9
ALIGNING MARK INLET MUST BE	3
IN HEATED AREA	
Mode	el 22
5' ON CENTER 7 1/2' 1 10 11/2' 1	
IN HEATED AREA	
SEE INLET WALL THICKNESS	
OVERALL LENGTH	
	2
3 1/4* ON CENTER IN HEATED AREA 9 1/4* 9 1/4* 9 1/4*	4
SEE INLET WALL THICKNESS	
SEE INLET WALL THICKNESS DESCRIPTIONS OVERALL LENGTH	

Model 14, 16, 17, 19 Inlets Dia. X Min. Length Req'd. In Heated Area С COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside 7/8" Dia X 15/16" 1/2" Copper Sweat Fitting C1 Model 14 ONLY 7/8" Dia X 1/2' COMBINATION CP 1/2" Male Pipe Thread 1/2" Female Sweat 15/16" Dia X 1 1/4" C3 3/4" Female Sweat Fitting 1 1/16" Dia X 1 3/8" COMBINATION Р 1/2" Female Pipe Thread 3/4" Male Pipe Thread 1 1/16" Dia X 1 3/8' PX 1/2" PEX Tube Fitting 7/8" Dia X 1 1/8" PX3 3/4" PEX Tube Fitting 7/8" Dia X 1 1/8' W 1/2" Wirsbo®/Uponor Tube Fitting 7/8" Dia X-1 1/2' **W3** 3/4" Wirsbo®/Uponor Tube Fitting 1 1/4" Dia X 1 3/4" COMBINATION CM 1/2" Compression Fitting 1/2" Copper Sweat Fitting 15/16" Dia X 1 1/4"

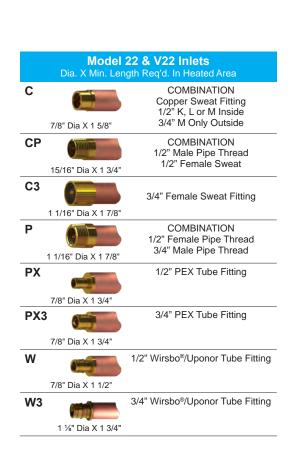

FREEZELESS: (Tube won't freeze when hose is detached)

MODEL 14

- No Anti-Siphon Protection
- Round, powder coated, die-cast aluminum handle
 Packed 10 Per Master Carton





Best Selling Residential Wall Faucet

MODEL 17

- Anti-Siphon ProtectedASSE-1019-C Listed
- Round, powder coated, die cast aluminum handle

MODEL*		WALL THICKNESS									
WODEL	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
14C, 14CP, 14C1, 14PX, 14W	57.25	60.70	64.15	67.60	71.05	74.50	77.95	81.40	84.85	88.30	91.75
14P, 14C3, 14PX3	60.00	63.45	66.90	70.35	73.80	77.25	80.70	84.15	87.60	91.05	94.50
14CM, 14W3	62.60	66.05	69.50	72.95	76.40	79.85	83.30	86.75	90.20	93.65	97.10
17C, 17CP, 17PX, 17W	60.05	63.50	66.95	70.40	73.85	77.30	80.75	84.20	87.65	91.10	94.55
17P, 17C3, 17PX3	62.55	66.00	69.45	72.90	76.35	79.80	83.25	86.70	90.15	93.60	97.05
17R	63.80	67.25	70.70	74.15	77.60	81.05	84.50	87.95	91.40	94.85	98.30
17CM, 17W3	65.10	68.55	72.00	75.45	78.90	82.35	85.80	89.25	92.70	96.15	99.60

*SUFFIX BP-Bulk pack cartons of 24 units are available at \$0.80 per unit less than published price on 4", 6", 8" 10" & 12" lengths ONLY.

Plastic Handle (Suffix PH). Tee Key (Suffix TK) - Add \$5.10 list each.


ANTI-BURST: (Tube won't rupture even if hose is attached)

Patented - PRV Pressure Relief Valve - Standard on models 16, 19, 22, V22 & C22

The patented, resetting PRV prevents the faucet tube from bursting in freezing conditions even if a hose is unintentionally left on.

The PRV protects up to 125 psi of backpressure and therefore does not require an add-on vacuum breaker.

Upgrade the Model 14 & 17 with RK-PRV Rod Assembly



PATENTED ANTI-BURST PRV

- See details above.
- · ASSE-1019-C Listed (Model 19)
- · Oval, powder coated, die cast aluminum handle





Packed 10 Per Master Carton

MODEL*	WALL THICKNESS										
MODEL	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
16C, 16CP, 16PX, 16W	67.25	70.70	74.15	77.60	81.05	84.50	87.95	91.40	94.85	98.30	101.75
16P, 16C3, 16PX3	70.00	73.45	76.90	80.35	83.80	87.25	90.70	94.15	97.60	101.05	104.50
16CM, 16W3	72.60	76.05	79.50	82.95	86.40	89.85	93.30	96.75	100.20	103.65	107.10
19C, 19CP, 19PX,19W	70.05	73.50	76.95	80.40	83.85	87.30	90.75	94.20	97.65	101.10	104.55
19P, 19C3, 19PX3	72.55	76.00	79.45	82.90	86.35	89.80	93.25	96.70	100.15	103.60	107.05
19R	73.80	77.25	80.70	84.15	87.60	91.05	94.50	97.95	101.40	104.85	108.30
19CM, 19W3	75.10	78.55	82.00	85.45	88.90	92.35	95.80	99.25	102.70	106.15	109.60

*SUFFIX BP-Bulk pack cartons of 24 units are available at \$0.80 list per unit less than published price on 4", 6", 8" 10" & 12" lengths ONLY.

Plastic Handle (Suffix PH). Tee Key (Suffix TK) - Add \$5.10 list each.

- Hot and Cold connections
- Patented anti-burst PRV Pressure Relief Valve See details above.
- ASSE-1019-C Listed
- IAPMO/UPC® Listed
- · Built-in anti siphon vacuum breaker
- One-piece head casting with integral hose connection
- · Oval, powder coated, die cast aluminum handles





Packed 4 Per Master Carton

MODEL 22 or V22		WALL THICKNESS											
WIODEL 22 OF V22	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"		
C, CP, PX, W	177.55	184.45	191.35	198.25	205.15	212.05	218.95	225.85	232.75	239.65	246.55		
P, C3, PX3	181.15	188.05	194.95	201.85	208.75	215.65	222.55	229.45	236.35	243.25	250.15		
W3	186.40	193.30	200.20	207.10	214.00	220.90	227.80	234.70	241.60	248.50	255.40		

Optional DMP Drywall Mounting Plate. See Page 4 For Details.

Tee Key (Suffix TK) - Add \$5.10 list each.

WOODFORD

- (

WF-MS Wall Faucet Mounting Sleeve List Price Each......\$18.20

- Boxed 10 to a carton -

FOR USE WITH MODELS 14, 16, 17 & 19 ONLY

The WF-MS Wall Faucet Mounting Sleeve takes the guesswork out of how far to stub-out Woodford freezeless faucets through brick, stone or stucco veneers. Built-in anchors provides a secure installation for the faucet.

The 6" long Mounting Sleeve allows the plumber to determine a stub-in location and set an adjustable finish depth required by the brick or stone mason. A numbered scale, in 1/4" increments, is built into the top of the Mounting Sleeve.

The faucet installation is completed by mating the faucet wall flange to the front of the Mounting Sleeve and securing with two, furnished flange screws. The proper drain angle is automatically set by the rear Tube Rest.









SL-17 Vandal Resistant Stem Lock List Price Each.....\$67.40

FITS WOODFORD MODELS:14, 16, 17, 19, 22, & V22 Easy to retrofit:

Replace the standard packing nut with furnished brass locking nut and snap on the Lock. 2 keys are included. Easy access and operation:


- 1. Unlock and remove the Lock to reveal the faucet operating rod.
- 2. Use Tee Key to operate faucet.



RK-OSF - Over Sized Flange List Price Each......\$3,55

FITS WOODFORD MODELS: 14, 16, 17, 19 & 101

- Fits behind an existing Woodford faucet flange to secure a loose fitting faucet or cover a larger opening in the wall.
- Requires 3/8" space behind original flange.



DMP-Drywall Mounting Plate List Price Each......\$33.25

USE WITH WOODFORD MODEL 22 OR V22 AND 122 OR V122 (MILD CLIMATE) MODELS.

The DMP provides

- a secure anchor for the faucet
- clean and precise drywall installation
- fire retardant plastic

The DMP Mounting Plate can be configured in a horizontal or vertical position ready for faucet installation and plumbing

Made from strong PC/ABS, the 4" X 91/4" Mounting Plate is designed to space the faucet wall flange away from 5/8" drywall just enough for finishing off with two mating Cover Plates leaving a durable and protective installation.

See website for installation instructions.



RK-ADJ-PRV

Adjustable Operating Rod Converts Faucet To Anti-Burst List Price Each...... \$37.90

FOR USE WITH MODELS 14, 16, 17, 19, 22 & V22

- Adjustable Operating Rod assembles and adjusts for combinations of 4" to 14" model lengths in 2" increments.
- *Includes the patented, resetting Pressure Relief Valve (PRV) upgrade. The PRV is designed to prevent the copper tube from bursting in freezing conditions even if a hose is unintentionally left on.
- Includes (4) all brass stems and (2) stainless steel clips plus (1) each replacement parts EPDM Packing, Packing Nut, Round Metal Handle and Handle Screw.
- Complete instructions are provided with each RK-ADJ-





LAWN SPRINKLER SUPPLY


- Provides outside access to water supply for easy start-up, winterizing and service Controls water service from the building exterior
- High flow rate and low pressure loss
- Head casting fits flush against an existing wall Pipe casing will pass through a 1-7/8" hole Outlet fittings included: ¾" NPT Add feature -1IN to include 1" NPT

- Brass finish only
- Galvanized pipé casing

MODEL 32	4"-6"-8"	WALL THICKNES 10"-12"-14"-16"	S 18"-20"-22"-24"
32C, 32P	327.30	338.05	348.80
With 1" NPT -1IN	347.00	357.75	368.50

OPTIONAL - Brass Pipe Casing

Made To order - No Cancel No Return - Contact factory for pricing

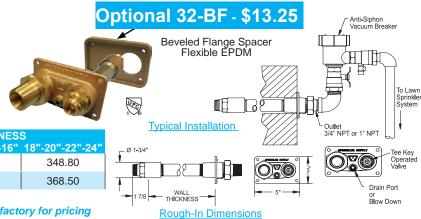

Inlet descriptions

Model 25, 27, 30

Dia. X Min. Length Req'd. In Heated Area





15/16" Dia X 1 5/8"

COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside





COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat

15/16" Dia X 1 3/4"



COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat

1 1/16" Dia X 1 7/8'



COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread

1 1/16" Dia X 1 7/8'





1/2" PEX Tube Fitting

15/16" Dia X 1 3/4'


PX3




3/4" PEX Tube Fitting


15/16" Dia X 1 3/4"

Rough-In Dimensions / O.A.L.



Model 25 or 27





AUTOMATIC DRAINING • FREEZELESS • ANTI-BURST

Model 25 Backflow Protected Model 27

Model 34HA Anti-Siphon Vacuum Breaker ASSE 1019-B



Vandal Resistant Wall Faucets

Order the Model 25 or 27 with removable

With Patented High Flow

Double Check 50HA Backflow Preventer Field Testable ASSE 1052 Device No Sprayback





MODEL 25 or 27	WALL THICKNESS											
WODEL 29 01 21	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	
C, CP, PX	107.55	111.05	114.55	118.05	121.55	125.05	128.55	132.05	135.55	139.05	142.55	
P, CP3, PX3	112.65	116.15	119.65	123.15	126.65	130.15	133.65	137.15	140.65	144.15	147.65	

Must specify Model Inlet and Wall Thickness



Automatic Draining • Freezeless • Anti-Burst

Model 30 Backflow Protected

Inlet and Rough-In Dimensions shown on page 6

The Woodford Model 30 faucet automatically drains with or without a hose attached. The faucet is designed for residential and light commercial outside water service applications.

- - Attached 50HA Backflow Preventer features: All structural components made of brass

 - ASSE 1052 & UPC Listed
 - High Flow Double Check • Field Testable
 - Brass Stem
 - · Holds against 125 p.s.i. backpressure
- Model 30 wall faucet is ASSE 1053 Approved.
 No sprayback when faucet is shut off

 - U.S. Patent No's. 8,042,565 & 8,272,394 No lead solder
 - · Oval, powder coated, die-cast aluminum handle (Tee Key available)
 - Max pressure: 125 p.s.i.
 - Max Temperature: 120° F

Model 30 ONLY - Individual Carton Prices - Must specify Model, Inlet and Wall Thickness - Example: 30CP-6

MODEL	WALL THICKNESS										
MODEL	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
C, CP, PX	107.55	111.05	114.55	118.05	121.55	125.05	128.55	132.05	135.55	139.05	142.55
P, CP3, PX3	112.65	116.15	119.65	123.15	126.65	130.15	133.65	137.15	140.65	144.15	147.65

Tee Key (Suffix TK) - Add \$5.10 list each.

Model 30 with -MS Mounting Sleeve - Individual Carton Prices

Must specify Model, Inlet, Wall Thickness and MS - Example: 30CP-6-MS

MODEL	WALL THICKNESS										
MODEL	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
C, CP, PX	N/A	130.90	134.40	137.90	141.40	144.90	148.40	151.90	155.40	158.90	162.40
P, CP3, PX3	N/A	136.00	139.50	143.00	146.50	150.00	153.50	157.00	160.50	164.00	167.50

Tee Key (Suffix TK) - Add \$5.1.00 list each.


WF-30MS Mounting Sleeve ONLY.....List Price Each...... \$19.85

The Woodford Model 30 Wall Faucet Mounting Sleeve (WF-30MS) takes the guesswork out of how far to stub-out Woodford Model 30 freezeless faucets through brick, stone or stucco veneers. It also provides a secure anchor for the

The 6" long Model 30 Mounting Sleeve allows the plumber to determine a stub-in location and set an adjustable

finish depth required by the brick or stone mason. A numbered scale in 1/2" increments, is built into the top of the Mounting Sleeve.

The faucet installation is completed by mating the faucet wall flange to the front of the Mounting Sleeve and securing with two, furnished flange screws. The proper drain angle is built-in to the faucet head casting.



MB30BX Modular Box System..... List Price Each..... \$128.40

Includes Composite Box, Door & Fascia - Use with the MODEL 30 - Not Included

The Woodford Modular Box System (MB30BX) is designed to securely house a Model 30 wall faucet on residential buildings. The MB30BX includes a high impact composite box that is stubbed out of a frame or masonry wall. After the wall is finished, a durable composite door and fascia assembly is simply screwed into the box to create a secure access and an attractive front.

Standard: Thumb latch cylinder lock. Optional: Key (K) cylinder lock. Call for Pricing



Standard Thumb Latch





RK-30MBDR.....List Price Each \$63.50

Replaceable Composite Door & Fascia Repair Kits Shipped in individual carton WATER • Fits the MB30BX Modular Box Tan color • (2) Lock options

RK-30MBDR Standard: Thumb Latch Cylinder Lock



RK-30MBDR-K Optional: Key (K) Cylinder Lock Add 30.95 list

RK-Bracket List Price Each \$20.25

RK-Bracket can be used to mount or support the box in a stud wall. Hole centers are provided on back of box for drilling (2) 9/32" holes. Bracket extends from 10" to 19".





Inlet and Rough-In Dimensions shown on page 9

Model 65

Model 67

ASSE 1019-B Listed With ASSE 1011 Anti-Siphon 34HA Vacuum Breaker Standard on B65 & RB65



With Patented High Flow Double Check 50HA Backflow Preventer Field Testable; ASSE 1052 Device No Sprayback Standard on B67 & RB67



On All Commercial Details On Page 27

WALL HYDRANTS & FACTORY ASSEMBLED - SQUARE (B) & ROUND (RB) BOX TYPE WALL HYDRANTS FREEZELESS / AUTOMATIC DRAINING / CHROME FINISH STANDARD

MODEL 65 or 67	WALL THICKNESS							
WODEL 65 OF 67	CC-4"-6"-8"	10"-12"-14"-16"	18"-20"-22"-24"					
C or P Inlet	328.20	349.30	370.40					
B65 or B67, C or P Inlet	661.65	682.75	703.85					
RB65 or RB67, C or P Inlet	680.00	701.10	722.20					

Must specify Model, Inlet and Wall Thickness

OPTIONAL FINISH Hydrants Only: Rough Brass (BR) - Deduct -5.95 Polished Brass (PB) - Add 47.65 list each. N/A over 24" wall thickness.

OPTIONAL FINISH Square Box Only: Rough Brass (BR) - Deduct -11.05 list each; Polished Brass (PB) - Add 76.20 list each;

Cylinder Lock Door: Specify Suffix (K) - Add 34.05 list each. - Available on Chrome Square Box Only;

Flat door available for B65 ONLY (Suffix F) - N/C - Example: B65C-10-F);

Round Box -Chrome Finish Only. Order RB67BX (Bubble door only); N/A over 24" wall thickness.

B65 RB65 B67 RB67



Round Box models install through 6" diameter cored hole or 6" Sch. 40 PVC sleeve.





NOTE: Chrome box assemblies are available to convert existing wall hydrant inventory to box type wall hydrants.

*When converting to box type hydrant, deduct 2" from hydrant.

• EXAMPLE: B65-10" requires Box + 8" Model 65 or 67.

*Order 65BXF to convert to flat door on square box typeAdd \$333.50 list each.

*Order 67BX to convert to box type B65 or B67Add \$333.50 list each.

*Order RB67BX to convert to round box type RB65 or RB67 ...Add \$351.80 list each.

MB65 or MB67 Modular Box Models

MB65BX or MB65BX-K



2.6 pound, high impact, composite box with a replaceable 14 ga. stainless steel door and fascia assembly.

- MB65 or MB67: Modular box and Hydrant Assembly
- MB65BX: Modular Box, SS Door & Fascia Assembly Only
- RK-65MBDR: Stainless Steel Door & Fascia Repair Kit Assemblies

(See Page 22 Door Assembly Repair Kits)



5 %"

2,2

'n



MODEL	WALL THICKNESS							
MODEL	CC-4"-6"-8"	10"-12"-14"-16"	18"-20"-22"-24"					
MB65 or MB67, C or P Inlet	557.00	578.10	599.20					
MB65-K or MB67-K, C or P Inlet	592.00	613.10	634.20					
MB65BX (Tee Key Lock) - No Hydrant - M	228.85							
MB65BX-K (Cylinder Lock) - No Hydrant -	263.85							

Model 68 Undercover Wall Hydrant®



www.woodfordmfg.com

- ASSE 1053 listed hydrant
 Integral, Flip-Down 16 ga. Stainless Steel Cover
- Sleek, streamlined design only 1" protrusion from wall
- Vandal Resistant w/Tee Key Lock
- Chrome plated, flush mounted cast brass hydrant head
- Model 50 ASSE 1052 High Flow Double Check Backflow Preventer
- Automatically drains even with hose attached

	WALL THICKNESS										
MODEL 68	CC-4"-6"-8"	10"-12"-14"-16"	18"-20"-22"-24"								
C or P Inlet	473.30	494.80	516.30								

Must specify Model, Inlet and Wall Thickness

WOODFORD

2-3-2025v



Details On Page 27

HC67

Hot & Cold Mixers

HCB67



Includes Patented
ASSE 1052 Nidel®
50HA High Flow
Double Check Backflow Preventer
Field Testable and
No Sprayback





ONLY AVAILABLE IN CHROME

MODEL	WALL THICKNESS							
WODEL	CC-4"-6"-8"	10"-12"-14"-16"	18"-20"-22"-24"					
HC67*	792.40	817.40	842.40					
HCB67 Box Type**	1,350.70	1,375.95	1,401.20					

N/A over 24" wall thickness


C22 Hot & Cold - Light Commercial B22



Drywall Mounting Plate (DMP) Available for the C22. see page 4 Includes Patented ASSE 1052 Nidel® 50HA High Flow Double Check Backflow Preventer Field Testable and No Sprayback

Includes (2) Patented PRV Pressure Relief Valves see page 3

CHROME FINISH STANDARD



(2) Brown Powder Coated Metal Handles (Suffix MH) - Add 1.2. Tee Key (Suffix TK) - Add 5.20 list.

B22 Available in Rough Brass (BR) - Deduct (\$13.00) list. Box only (22BX).... 677.95 list.

SL-65 Vandal Resistant Stem Lock List Price Each...... \$80.70

The SL-65 fits Models 65/67, B65/B67, RB65/RB67, MB65/MB67, 70,74,76, 75, 79, 84 & 86 series products.

NOTE: The SL-65 will not fit in the B65 with Flat Door or the Model 68 Undercover™ Wall Hydrant.

Replace the standard packing nut with the furnished brass locking nut and snap on the lock. 2 keys are included.

A Tee key is included for operating the faucet when lock is removed.





Model C22 & B22 Inlets - Dia. X Min. Length Req'd. In Heated Area

7/8" Dia X 1 5/8"

COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside 1 1/16" Dia X 1 7/8'

3/4" Female Sweat Fitting

et PX



1/2" PEX Tube Fitting

7/8" Dia X 1 3/4'



15/16" Dia X 1 3/4"

COMBINATION 1/2" MPT 1/2" Female Sweat 1 1/16" Dia X 1 7/8"

COMBINATION 1/2" FPT 3/4" MPT PX3

3/4" PEX Tube Fitting

7/8" Dia X 1 3/4"

Model 70 - Galvanized Pipe Casing

GALVANIZED PIPE CASING / CHROME FINISH STANDARD



P Inlet C Inlet 3/4"-14 FPT 3/4" Copper Tube Solder Connection
 MODEL
 WALL THICKNESS


 4"-6"-8"
 10"-12"-14"-16"
 18"-20"-22"-24"

 70C, 70P
 252.45
 261.50
 270.55

OPTIONAL FINISH: Polished Brass (PB) Add 33.70 Brass (BR) Deduct -5.95

OPTIONAL - Brass Pipe Casing Made To order - No Cancel No Return









WOODFORD

OVERALL LENGTH

Model 65 & 67 Inlet Descriptions On All Commercial Details On Page 27 **C** Inlet P Inlet 3/4" FEMALE PIPE THREAD 3/4" COPPER WATER TUBE 1 3/8" 1 3/8" 4 3/8" - 4 3/8" B65 & B67 (\bigcirc) WATER 6 1/2" 2" 4 3/8" 4 3/8" 4 3/8" WALL **THICKNESS** 2 5/8" 7 1/2" OVERALL LENGTH OAL=Wall Thickness + Inlet Close Coupled OAL = 5" ← WALL ← THICKNESS 7/16 OVERALL LENGTH OAL=Wall Thickness + Inlet Close Coupled OAL = 7 3/8" 2 3/4" 4 3/8" 2 3/8' - 3 3/4"-4 3/8" 2 1/8" COLD INLET 1 1/4" 1 1/4" COLD INLET 6 1/2 5 1/2" 3 1/2 HOT WATER 3" 3' OR COLD 10 1/16" 1 1/4" - HOT INLE 1 1/4" 5 1/16" 12 5/16" 4 3/4 HOT - WALL -INLET THICKNESS WALL-THICKNESS 9" -6 11/16" MIN. OVERALL LENGTH (CLOSE COUPLED) MIN. OVERALL LENGTH (CLOSE COUPLED) 11 5/16" 9 1/4 **RB65 &** WATER - 4 3/8" 2 1/2" 6 15/16" Dia. WALL THICKNESS 4 3/8" 2 7/8" OVERALL LENGTH OAL=Wall Thickness + Inlet Close Coupled OAL = 7 3/8" Install using 6" Dia. Core Drill - 5 7/8" Dia. -

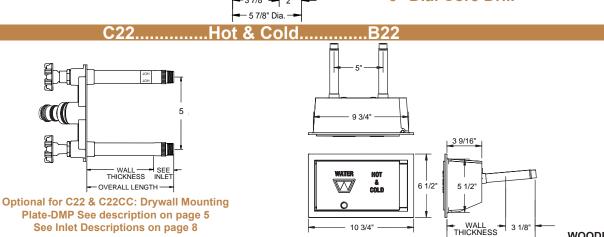

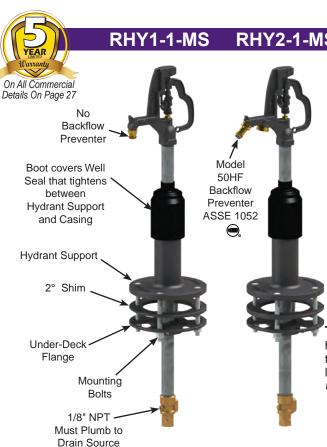

Freezeless Roof Hydrants are designed to facilitate a secure, exterior water source installation on commercial roof surfaces. The hydrant is installed through the roof and plumbed to the non-freezing interior water source. The hydrant is supported by a heavy duty cast iron (MS) Mounting System. All necessary mounting hardware for proper installation on a commercial roof is supplied, including a 2 degree shim for pitch adjustment.

Roof Hydrants are specified for washing condenser coils, windows, cooling towers, green roofs and other types of roof top equipment.

- · Choose from 4 specific models.
- Order a complete Hydrant and Mounting System package or individual Hydrant or Mounting System units.
- All hydrants are operated by lifting the lever handle or turning a wheel handle.
- All repairs can be made from the top of the hydrant.

The patented *RHY1-1-MS* is the most reliable hydrant where backflow protection is not required. A 1/8" NPT tapped drain hole in valve body should be piped to a drain location to prevent freezing. The user is not required to flush the hydrant.

ROOF HYDRANT	PRICE
RHY1-1-MS (Complete)	1,217.30
RHY1-1	710.65

The patented RHY2-1-MS features a built-in vent that allows automatic draining when hydrant is shut off, even with a hose and device attached. A 1/8" NPT tapped drain hole in the valve body should be piped to a drain location to prevent freezing. Includes ASSE 1052 Model 50HF Backflow Preventer. The user is not required to flush the hydrant.

ROOF HYDRANT	PRICE
RHY2-1-MS (Complete)	1,380.70
RHY2-1	874.05

ASSE 1057 SRH-MS Sanitary Roof Hydrant



NO Drain Line Required!

This hydrant does not require removal of vacuum breaker or use of a diverter to protect from freezing.

With hose removed, a venturi action draws water out of the internal reservoir and discharges through the outlet. Note: Special operating instructions to insure proper evacuation. Includes ASSE 1052 Model 50HF Backflow Preventer.

ROOF HYDRANT	PRICE
SRH-MS (Complete)	1,486.45
SRH	979.80

The RHMC-MS Mild Climate Roof Hydrant is an excellent choice in non-freezing environments. The shut-off valve is located in the hydrant head and is wheel handle operated. Includes ASSE 1052 Model 50HF Backflow Preventer.

ROOF HYDRANT	PRICE
RHMC-MS (Complete)	867.40
RHMC	360.75

The cast iron RH-MS Roof Hydrant Mounting System can be ordered separately with all required hardware included.


ROOF HYDRANT	PRICE
RH-MS	506.65

SRH-MS RHMC-MS





360.75



Part# RHY1-1

Carton contents consists of:

- Y1 Hydrant
- Assembly Well Seal
- Boot

Shipped in 1 Carton. Shipping Wt. - 20 lbs



Part# RH-MS

Carton contents consists of: Mounting System/Rough-In Components

- Hydrant Support cast iron
- 2° Shim cast iron
- Under Deck Flange cast
- Mounting Bolts, Nuts & Washers

Shipped in 1 Carton. Shipping Wt. - 30 lbs



On All Commercial Details On Page 27



carton.

Total Shipping Wt.

2 cartons: 50 lbs

Part# RHY2-1

Carton contents consists of:

- Y2 Hydrant Assembly
- Well Seal
- Boot

Shipped in 1 Carton. Shipping Wt. - 20 lbs



Part# RHMC-MS

Consists of the complete Roof Hydrant system:

Qty.1 RHMC Hydrant shipped in 1 carton



Total Shipping Wt. 2 cartons: 50 lbs




Part# RHMC

Carton contents consists of:

- Assembly



Shipped in 1 Carton. Shipping Wt. - 20 lbs




Part# SRH

Carton contents consists of:

- Hydrant
- Assembly • Well Seal
- Boot


Shipped in 1 Carton. Shipping Wt. - 20 lbs



Rubber Well Seal Draws Down To Expand Against Walls Of Hydrant And Hydrant Support.

Weather Seal Boot 8" Bolt Circle 5 5/8" 3" Dia. Тур. Hydrant Hole 3/4" Drill (4) Bolt Holes

Hole Pattern Use Hydrant Support as template

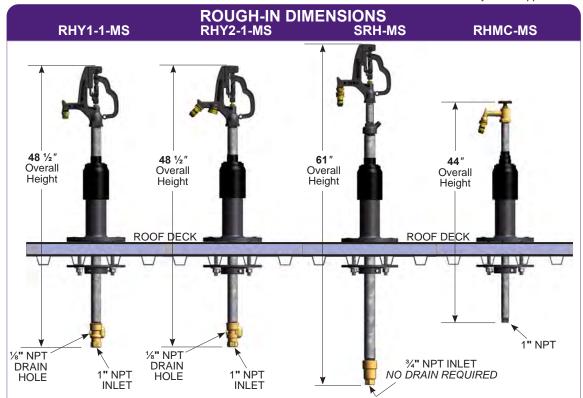

Model 101 Residential











- ASSE 1019-Type C Listed \$\emptyset\sigma\$
- Anti-siphon protection with integral check valve and atmospheric vent
- Eliminates the need for an add-on vacuum breaker
- Choose from five inlet options
- Round, powder coated, die-cast aluminum handles Standard
- Wall flange is included with all models

MODEL	PRICE
101C - 1/2" & 3/4" Copper Sweat Inlet	50.80
101CP - 1/2" MPT & 1/2" Sweat Inlet	50.80
101P - 3/4" MPT & 1/2" FPT Inlet	54.35
101PX - 1/2" Pex Tube Inlet	50.80
101CM - 1/2" Compression Fitting/Copper Sweat	54.35

Suffix-BP-Bulk Pack Cartons of 6 units are available @ 80¢ less per unit than published prices.

Model 122 & V122 Hot & Cold Residential



- ASSE 1019-Type C Listed
- Anti-siphon protection with integral check valve and atmospheric vent
- Eliminates the need for an add-on vacuum breaker
- Choose from five inlet options
- (2) Oval, powder coated, die-cast aluminum handles Standard

MODEL	PRICE
122C or V122C - 1/2" & 3/4" Copper Sweat Inlet	207.65
122CP or V122CP - 1/2" MPT & 1/2" Sweat Inlet	207.65
122P or V122P - 3/4" MPT & 1/2" FPT Inlet	211.10
122PX or V122PX - 1/2" Pex Tube Inlet	207.65
122CM or V122CM - 1/2" Compression Fitting/Copper Sweat	211.10


Model 30CC Residential




The optional MB30BX can be used with the Model 30CC See page 5 for details.

- Close Coupled version of the freezeless Model 30
- ASSE 1053 Backflow Protected, Automatic Draining;
- UPC, cUPC Approved
 ASSE 1052 Nidel® Model 50HA High Flow Double Check Backflow Preventer
- Fits within a 2 X 4 stud wall and
- Drains automatically with or without an attached hose
- Available with a composite box, door and fascia.

MODEL	PRICE
30CC (CP or PX Inlet Optional)	101.75
SL-17 Stem Lock for the Model 30 (Shown on page 4)	67.40
4 5%"	



Model MB221, MB224, MB226 Commercial



- Integral water supply stop is located at the faucet head
- 1/2-14 FPT Inlet connects through side of box
- Modular Box and Stainless Steel Door (3.3 lbs)
- Door Lock: Tee Key or Cylinder Lock (K)

MODEL		PRICE
MB221	Offers No Anti-Siphon Protection	356.95
MB224	Includes Single Check Vacuum Breaker	372.50
MB226	Includes 50HF Backflow Preventer	372.50

^{*}Key Cylinder Lock (Suffix K) Add 350 list each

Model C22CC, B22CC Hot & Cold Commercial





- Chrome plated brass head
- ASSE 1052 Nidel® Model 50HA High Flow Double Check Backflow Preventer e

MODEL	O.A.L.	CHROME
C22CC (CP & PX Inlet Optional)	2 3/4"	\$345.40
B22CC (CP & PX Inlet Optional) - Box Type	6 1/8"	\$1,002.95

B22CC Available in Rough Brass; B22 (BR) call for pricing



21, 24, 26, Y24/Y26 Series

- · 21 Series: Hose Nozzle outlet with No Anti-Siphon Protection
- 24 Series: ASSE 1011 Nidel® 34HF Single Check Vacuum Breaker
- 26 Series: ASSE 1052 Nidel® 50HF High Flow Double Check Backflow Preventer



Standard Finish: Rough chrome; Optional: Rough brass (BR); Polished Chrome (PC)

Inlet Options:

- P1/2 = 1/2" FPT
- P3/4 = 3/4" FPT
- C = Combination 1/2" and 3/4" Copper Sweat
- CP = Combination 1/2" MPT and 1/2" Copper Sweat







Stem Lock - Chrome/Gray 67.40







SL-24 Stem Lock Optional: SL-24 Vandal Resistant Stem Lock is available for all 21, 24 26 & B26 models. 67.40


See page 4 for Stem Lock details.

MODEL	FEATURES	ROUGH BRASS (BR)	ROUGH CHROME (CH)	POLISHED CHROME (PC)
21P1/2 or 21P3/4	3/4" Hose Nozzle	60.40	69.95	85.70
21C or 21CP		86.50	96.05	111.80
24P1/2, 24P3/4, 26P1/2 or 26P3/4	34HF Single Check or 50HF Double Check	75.35	84.90	99.45
24C, 24CP, 26C or 26CP		107.35	116.90	131.45
Y24 or Y26		92.35	99.05	112.25

MB24, MB26, MB24BX Modular Wall Box System

- Includes Composite Box, 14 gauge Stainless Steel Door & Fascia
- Order with or without a Model 24P or 26P faucet. See pricing below
- Faucet includes Wheel Handle & Tee Key
- Standard Faucet Finish: Rough chrome.
- Standard: Tee Key latch

SL-24

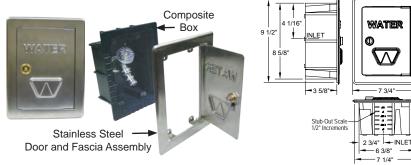

MODEL	FEATURES	PRICE
MB24-1/2 or 3/4	with composite box, SS door and fascia and ASSE 1011 34HF vacuum breaker	397.50
MB26-1/2 or 3/4	with composite box, SS door and fascia and ASSE 1052 50HF backflow preventer	397.50
MB24BX (No Faucet)	Modular Box System ONLY; composite box, SS door and fascia	312.65

B24, B26, Metal Wall Box Option

- Order with a Model 24P or 26P faucet. See pricing below
- Standard: Chrome Plated Brass Box & Door; Optional: Rough brass (BR); Polished Brass (PB)
- Standard: Wall Faucet Wheel Handle & Tee Key; Optional: Metal Handle Only (MH)
- Standard: Tee Key latch





Box is drilled for optional mounting bracket. Order: RK-Bracket Page 19

Use to mount B24 & B26 or MB24 & MB26

ч	•			
ı	3 7/8 NILET 3 3/4 WALL THICKNESS	8 3/4	7 1/8	
6	TH	ID OF READ IN 3 1/2 DEL 26	-2 3/4 - 3 3/8 - 6 1/8	-

MODEL	FEATURES	PRICE
B24-1/2 or 3/4	with chrome plated brass box and ASSE 1011 34HF vacuum breaker	661.15
*B26-1/2 or 3/4	with chrome plated brass box and ASSE 1052 50HF backflow preventer	751.20
B24BX	B24 Box w/Flat Door (B24BX)	573.00
B26BX	B26 Box w/Bubble Door (B26BX)	663.00

OPTIONAL FINISH: Rough Brass (BR) Deduct -11.40; Polished Brass (PB) Add \$74.90 *Metal Handle Available on B̃26 Only (S̀uffix́ MH)

WOODFORD

2-3-2025v7

70 & 80 Series Close Coupled



The unique design of the Model 75 and 79 allows the installer to rotate the 3/4" FPT inlet by hand to easily complete connection regardless of direction.

- · Loose Tee Key operated
- · Rectangular, recessed or flush mounting chrome plated brass heads
- · 3 Inlet options
- All models fit inside a 4" wall
- · Choose single check or double check models
- All hydrants are available with rectangular or round brass box and door
- Standard Finish: Chrome
- Optional Finish: (Extra charge) Rough Brass (BR) Polished Brass (PB)







Model 79 ASSE 1052

MODEL	FEATURES	PRICE
75	ASSE 1011 34HF vacuum breaker and swivel inlet with adjustable 360° orientation	272.85
79	ASSE 1052 50HF backflow preventer and swivel inlet with adjustable 360° orientation	296.65







Model 76

ASSE 1052



Model 84

ASSE 1011



Model 86 ASSE 1052

	-	<u> </u>	J a
MODEL	FEATURES		PRICE
74C, 74P	with straight nozzle and AS	SSE 1011 34HF vacuum breaker	289.40
84C, 84P	with angled nozzle and AS	SE 1011 34HF vacuum breaker	263.15
76C, 76P	with straight nozzle and AS	SSE 1052 50HF backflow preventer	317.45
86C, 86P	with angled nozzle and AS	SE 1052 50HF backflow preventer	292.55

OPTIONAL FINISH: Rough Brass (BR) Polished Brass (PB)



Model B74 or B75

ASSE 1011

Model B76 or B79

ASSE 1052



Model RB74 or RB75

ASSE 1011

Model RB76 or RB79
ASSE 1052




RECTANGULAR BOX	PRICE	ROUND BOX	PRICE	FEATURES
B74C or P	678.85	RB74C or P	706.40	with straight nozzle and ASSE 1011 34HF vacuum breaker
B75	662.30	RB75	689.85	with ASSE 1011 34HF vacuum breaker (360° Inlet orientation)
B76C or P	706.85	RB76C or P	734.40	with straight nozzle and ASSE 1052 50HF backflow preventer
B79	686.05	RB79	713.50	with ASSE 1052 50HF backflow preventer (360° Inlet orientation)

OPTIONAL FINISH: Rough Brass (BR) - Deduct (\$11.40) list each; Polished Brass (PB) - Add \$76.20 list each; Mounting Bracket Included, Cylinder Lock Door: (Suffix K) Available in Chrome Square Box Only Add \$36.45 Flat door available for B74 or B75 ONLY - (Suffix F)

Order 74BX box assembly to convert to box type B74, B75, B76, B79 Add \$389.45 list each.


Order RB74BX box assembly to convert to box type RB74, RB75, RB76, RB79 Add \$416.90 list each.

Rough-In Dimensions







360° Swivel Inlet



Model 84 & 86

C Inlet - 3/4" Female Copper Sweat P Inlet - 3/4" FPT









V26 Vertical

The Model V26 is an anti-siphon, vacuum breaker protected wall faucet designed for irrigation purposes in mild climate areas. The Model V26 is designed to be mounted directly to a wall or column with a top mount inlet. Designed to blend with modern architecture for installation on or in service stations, custodial services, churches, motels, restaurants, etc.

SPECIFICATIONS:

VACUUM BREAKER - ANTI-SIPHON:

- NIDEL® Model 50HF with 3/4 inch male hose thread
- ASSE Standard 1052 approved
- IAPMO® listed

EPDM PACKING: Prevents leaking.

PACKING NUT: Adjustable brass nut with deep stem guard.

VALVE SEAT: Standard "O" size washer.

HANDLES: Furnished with tan plastic wheel handle and loose

tee key.
INLET: ½ FPT.

MAX PRESSURE: 125 p.s.i.
MAX TEMPERATURE: 120° F
SHIPPING WEIGHT: (per unit): 1.4 lb

EXTERIOR FINISH: Rough Brass (BR) or Chrome (CH)


MODEL	FEATURES	PRICE
V26-CH	Model V26 Chrome	137.70
V26-BR	Model V26 Brass	129.10

Model V26




Chrome (CH)
Inlet Description
Top Inlet 1/2" FPT

Mild Climate Series Rough-In Dimensions

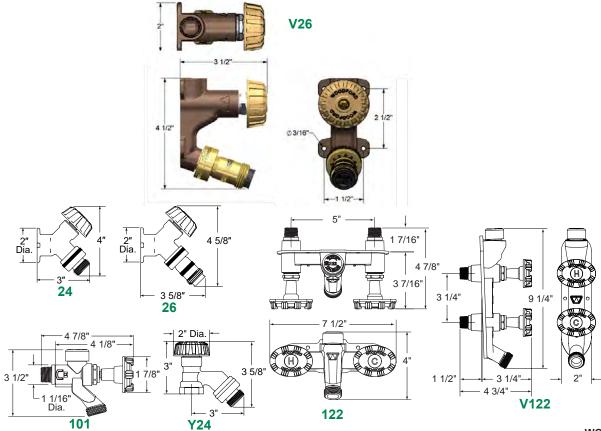


7 WOODFORD

All Yard Hydrants include a 1/8" NPT drain hole in the valve body.

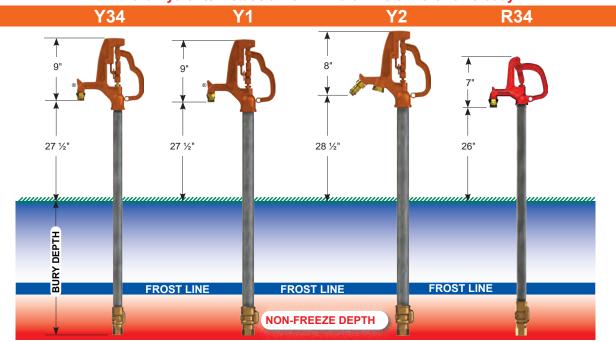


MODEL						BURY	DEPTH				
3/4 INLETS		1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
R34		119.75	131.90	144.05	156.20	168.35	180.50	192.65	N/A	N/A	N/A
W34		165.60	177.60	189.60	201.60	213.60	225.60	237.60	N/A	N/A	N/A
X34		137.65	149.80	161.95	174.10	186.25	198.40	210.55	N/A	N/A	N/A
Y30BR	(1)	292.65	304.85	317.05	329.25	341.45	353.65	365.85	N/A	N/A	N/A
Y30CH	(1)	354.55	366.75	378.95	391.15	403.35	415.55	427.75	N/A	N/A	N/A
Y34	(1)(3)	200.10	212.45	224.80	237.15	249.50	261.85	274.20	286.55	298.90	311.25
Y34 Stainless Steel	(5)	231.95	276.15	320.35	364.55	408.75	452.95	497.15	541.35	585.55	629.75
Y95	(1)(2)(4)	749.45	762.20	774.95	787.70	800.45	813.20	825.95	N/A	N/A	N/A
1" INLETS	1" INLETS										
Y1	(1)(3)	270.70	283.40	296.10	308.80	321.50	334.20	346.90	359.60	372.30	385.00
Y2	(1)(4)	331.30	348.05	364.80	381.55	398.30	415.05	431.80	N/A	N/A	N/A

- (1) Brass pipe casing and operating pipe available. Contact factory for pricing.
- (2) Polished brass Suffix PB finish: call for pricing
 (3) One Inch Hose Nozzle Suffix HN 26.15
- (4) Backflow Protected ASSE 1052 Model 50HF Backflow Preventer
- (5) Add -Suffix SS option for Stainless Steel*
- All Hydrants shipped with Head Cover Add Suffix BX for Box Add \$5.00
- ** 6' and longer must be shipped Freight/LTL

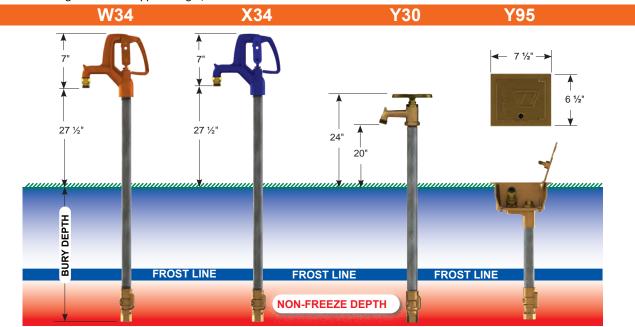



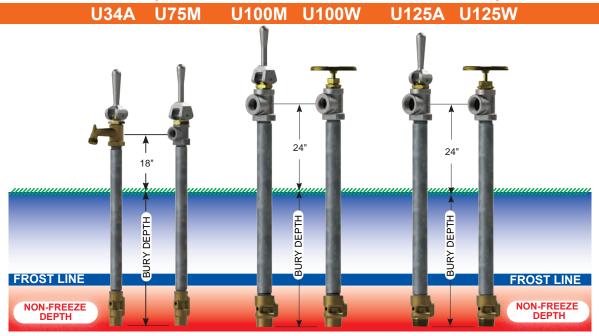

MODEL	L BURY DEPTH							
3/4 INLETS		1'	2'	3'	4'	5'	6'	7'
U34 Spout	(1)	317.55	331.05	344.55	358.05	371.55	385.05	398.55
U75 Tee	(1)	317.55	331.05	344.55	358.05	371.55	385.05	398.55
1" INLETS								
U100	(2)	386.75	408.65	430.55	452.45	474.35	496.25	518.15
1 1/4" INLETS								
U125	(2)	438.05	461.95	485.85	509.75	533.65	557.55	581.45
1 1/2" INLETS								
U150	(3)	996.85	1,020.75	1,044.65	1,068.55	1,092.45	1,116.35	1,140.25
2" INLETS								
U200	(3)	1,349.75	1,383.45	1,417.15	1,450.85	1,484.55	1,518.25	1,551.95

- (1) Specify Suffix "A" (Automatic Close Handle), "M" (Manual Close Handle)
 (2) Specify Suffix "A" (Automatic Close Handle), "M" (Manual Close Handle), "W" (Wheel Handle)
 (3) Specify Suffix "M" (Manual Close Handle), "W" (Wheel Handle)
 ** 6' and longer must be shipped Freight/LTL

U150M U150W U200M **U200W** 30" 30" BURY DEPTH **BURY DEPTH FROST LINE** FROST LINE NON-FREEZE DEPTH NON-FREEZE DEPTH

All hydrants on this page comply with Safe Drinking Water Act effective 1/4/2014

Model S3 & S4H



Freezeless, Low Lead, Sanitary Yard Hydrants are designed to produce immediate water flow in sub-zero temperatures.

 Specify for use in public areas such as camp grounds and parks or any location where low lead hydrants are required

Hydrants are completely sealed to prevent

ground water from entering the reservoir or service line

- Diverter spout allows independent water flow when hose is attached to backflow preventer
- The S4H meets ADA requirements for height and 5 lbs. maximum operating force
 - ** 5' and longer must be shipped Freight/LTL

MODEL	BURY DEPTH									
MODEL	1'	2'	3'	4'	5'	6'	7'			
S3/S4H	1,315.75	1,354.85	1,393.95	1,433.05	1,472.15	1,511.25	1,550.35			

OPTIONAL: ASSE 1057 Approved Device - Single Check Vacuum Breaker (Suffix SC)

S3 - Manual Close - Backflow Protected

S4H - ADA Compliant - SELF CLOSING - Backflow Protected

See web site for verification sheet

Thermaline®



The Thermaline[®], Low Lead, Sanitary Water Connector is a compact unit especially designed to provide water service to mobile homes in freezing conditions.

- Ideal wherever a freezeless sanitary tight line installation is needed, such as, waterers for livestock
- High strength plastic casing is insulated with permanently molded and bonded polyurethane foam
- 2 foot, 15 watt (110-120v) portable insert heater is standard on 2' 6' hydrants
- 4 foot, 30 watt (120v) portable insert heater is optional on 6' hydrants and standard on 7' and longer hydrants
- Costs about a penny a day to operate even at 50° below zero
- Wheel handle at surface level shuts off water below the frost line when hydrant is not in use

MODEL	BURY DEPTH								
MODEL	1'	2'	3'	4'	5'	6'	7'		
THERMALINE	348.20	369.45	390.70	411.95	433.20	454.45	527.05		

H34

Brass pipe casing and operating pipe available. Contact factory for pricing.


Available without heating element (Suffix NE) - Optional 6' Thermaline® with 4' Heater Add 51.35

The Model H34, Low Lead, Sanitary is a nondraining hydrant that features a thermostatically controlled heating element that prevents water in the hydrant from freezing even at temperatures down to 20 degrees below zero.

One foot bury depth closed system design

MODEL		PRICE
H34	3' long cord standard	563.25
H34-C12	Includes 12' cord	578.35
H34-C25*	Includes 25' cord	593.35

One Length Required. 1" MPT Male Thread Inlet *Call for 25' cord lead time

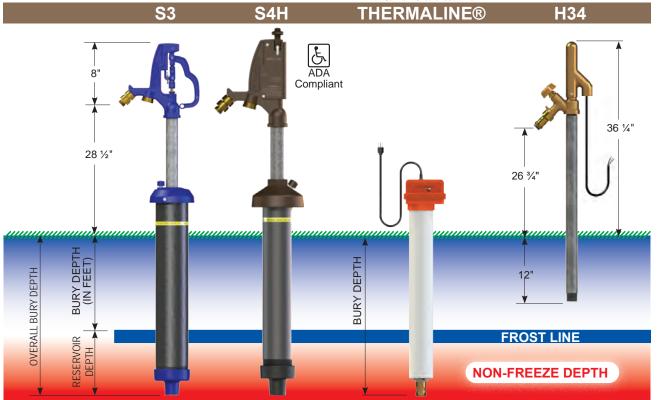



Hose Connection Nidel® Vacuum Breakers & Backflow Preventers



•		_ 。			- •				
ADD-ON DEVICES									
FINISH	34H	34HD	37HD1	37HD2	50H				
BRASS (BR)	21.65	31.70	85.35	115.45	33.95				
CHROME (CH)	28.50	38.80	97.40	127.50	40.20				



	Single Check ASSE 1011			Double Check ASSE 1052			
INTEGRAL DEVISES							
	FINISH	34HA	34HF	*34HW	**37HA	37HF	
	BRASS (BR)	28.85	29.90	61.65	43.25	80.80	
	CHROME (CH)	35.70	36.75	67.85	55.00	92.55	

34HA standard on Model 25 & 65; 34HF standard on Model 24, 43, 44, 45, 46, 74, 75, 84 50HA standard on Model 67; 50HF standard on Model 76, 79, 86

Double Check ASSE 1052

INTEGRAL DEVISES					
FINISH	*50HA	50HF			
BRASS (BR)	33.35	34.75			
CHROME (CH)	39.60	41.00			

50HA replaces VB222 and is standard on Model C22, B22, 27, 30 & 67 50HF standard on Model 26, Y2, H34, B26, Y95 * Converts Model 65 to Model 67



37HA




37HF

*Patented High Flow Double Check **Model 50 Backflow Preventer**

The first ASSE 1052 Approved automatic draining high flow double check backflow preventer.

When a hose is removed from a Model 50 equipped wall faucet or yard hydrant, two linked but independent checks move as one to open a path through the valve allowing water to drain completely and prevent freezing.

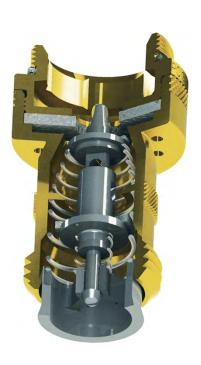

Repair Kits

RK-14/17MH

METAL WHEEL **HANDLE 8 SPLINES**



1. 30096 Wheel Handle-Metal

2. 30002 Handle Screw



MODEL 25 & 27 WHEEL HANDLE 5/16 SQUARE SHANK

1. 30239 Wheel Handle

2. 30234 Handle Screw







\$2.70







BRACKET FOR BOX TYPE **HYDRANTS**



RK-17VB

MODEL 17 VACUUM BREAKER FLOAT KIT



\$2.70

\$2.75



RK-122VB

FLOAT KIT

MODEL 122 & V122 **VACUUM BREAKER** FLOAT KIT



\$2.70

RK-101VB

MODEL 101 VACUUM BREAKER FLOAT KIT



\$2.25

RK-22VB

MODEL 22 & V22 VACUUM BREAKER FLOAT KIT









Excellence. Always.

www.woodfordmfg.com

2-3-2025v7

^{* 55180} Nozzle Required;

^{**} Converts Model 65 to Model 67

RK-14MH

1. 30002 Handle Screw


3. 30059 Packing Nut

MODEL 14/18 METAL HANDLE

\$18.10 I

5. 30006 Packing Support Washer 2. 30096 Wheel Handle (Metal) 6. 30008 Valve Seat Rubber

7. 30009 Retainer Screw



RK-17MH

MODEL 17 **METAL HANDLE**

\$26.60

- 1. 30002 Handle Screw
- 2. 30096 Handle (Metal)
- 3. 30059 Packing Nut
- 4. 30560 EPDM Packing
- 5. 30421 Packing Washer


6. 30418 Check Valve

7. 30008 Valve Seat Rubber

8. 30009 Retainer Screw

9. RK-17VB Float Kit

10. 30459 Bevel Check Valve



RK-19

1. 30002 Handle Screw

2. 30559 Oval, Die Cast

Aluminum Wheel Handle

3. 30059 Packing Nut

MODEL 19

\$26.25

- 5. 30421 Packing Support Washer
- 6. 30459 Check Valve
- 7. 30008 Valve Seat Rubber
- 8. 30804 Retainer Screw
- 9. RK-19VB Float Kit



PRESSURE RELIEF VALVE UPGRADE KIT FOR MODEL 14 & 17 **RK-PRV**

1. 30002 Handle Screw

2. 30096 Round Metal Handle

- 3. 30059 Packing Nut
- 4. 30560 EPDM Packing
- 5. Valve Stem Assembly (See Chart)



RK-PRV-*							
Wall Thickness	Overall Length	PRICE					
RK-PRV-4	5 7/8"	33.95					
RK-PRV-6	7 7/8"	35.45					
RK-PRV-8	9 7/8"	36.95					
RK-PRV-10	11 7/8"	38.45					
RK-PRV-12	13 7/8"	39.95					
RK-PRV-14	15 7/8"	41.45					
RK-PRV-16	17 7/8"	42.95					
RK-PRV-18	19 7/8"	44.45					
RK-PRV-20	21 7/8"	45.95					
RK-PRV-22	23 7/8"	47.45					
RK-PRV-24	25 7/8"	48.95					
41							

* Insert wall thickness. Example for 10" wall thickness: RK-PRV-10

RK-25

MODEL 20/25/27

\$44.85

- 1. 30234 Handle Screw
- 2. 30239 Wheel Handle
- 3. 30241 Head Nut 4. 30236 Drain Guard
- 5. 30245 Headnut Gasket
- 6. 30238 Stem Screw
- 7. 35280 Drain Valve Assembly
- 8. 30230 Plunger Assembly

RK-30

MODEL 30

\$30.30

1. 30002 Handle Screw 2. 30559 Oval, Die Cast

Aluminum Wheel Handle

4. 30264 Stem Screw 5. 30105 Packing Washer

6. 35281 Drain Valve Assembly

7. 30260 Plunger Assembly





RK-ADJ-PRV

- 1. 35124 Inlet Stem
- 2. 35123 Middle Stem
- 3. 35122 Handle Stem
- 4. 30508 Stem Stop
- 5. Stainless Steel Clips (2)

ADJUSTABLE OPERATING ROD MODEL 14, 16, 17, 19, 22, V22

- 6. 30560 EPDM Packing
- 7. 30059 Packing Nut
- 8. 30096 Round Metal Wheel Handle
- 9. 30002 Handle Screw




\$37.90

- Adjustable Operating Rod assemblies for 4" to 14" model lengths in 2" increments.
- Includes the patented, resetting Pressure Relief Valve (PRV) upgrade.
- Complete instructions are provided with each RK-ADJ-PRV.





RK-22MH MODEL 22/V22 HOT AND COLD **METAL HANDLE** 1. 30566 Hot Plug Button Operating Rod Not Included 2. 30002 Handle Screw (2) 3. 30096 Round, Die Cast Alum. Wheel Handle (2) 10 4. 30059 Packing Nut (2) 5. 30560 EPDM Packing (2) 6. 30006 Packing Washer (2) 7. 30565 Cold Plug Button 8. 30459 Check Valve (2) 9. 30008 Valve Seat Rubber (2) 10. 30009 Retainer Screw (2) CHROME PARTS AVAILABLE UPON REQUEST AT ADDITIONAL CHARGE. Remove operating rod to service internal parts.

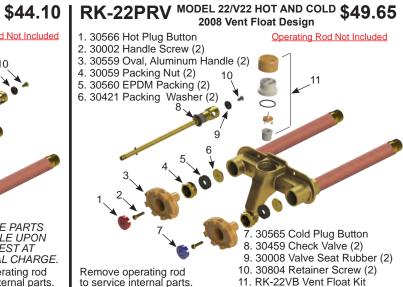

RK-101

1. 30002 Handle Screw

MODEL 101

\$27.55

- 2. 30096 Round, Die Cast Alum. Wheel Handle
- 3. 30570 Packing Nut Model 101
- 4. 30247 EPDM Packing
- 5. 30105 Packing Support Washer
- 30824 Anti-Turbulance Sleeve
- 7. 30459 Check Valve
- 8. 30008 Valve Seat Rubber
- 9. 30009 Retainer Screw



RK-32

1. 50611 AS-124 O-ring 2. 30107 Packing Nut-brass

3. 30247 EPDM Packing

4. 55176 Head Nut Assembly

5. 50035 1/4" Pipe Plug


MODEL 32 SPRINKLER SUPPLY

6. 51014 Yoke Nut 7. 50027 Plain Washer

8. 51013 Ball Valve Rubber

\$66.55

9. 50028 Round Brass Nut



RK-122 MODEL 122 & V122

- 1. 30566 Plug Button-H-Red
- 1a. 30565 Plug Button-C-Blue
- 30002 Handle Screw (2)
- 30559 Oval, Die Cast Alum. Wheel Handle (2)
- 30570 Packing Nut Model 101 (2)
- 30247 EPDM Packing (2)
- 30105 Packing Support Washer (2)
- 30824 Anti-Turbulance Sleeve (2)
- 8. 30459 Check Valve (2)
- 9. 30008 Valve Seat Rubber (2)
- 10. 30009 Retainer Screw (2)
- RK-122VB Vacuum Breaker Float Kit




RK-OSF

\$56.70

MODEL 14, 16, 17, 19, 101 \$3.55 **Over Sized Flange**

- 1. 30091 Oversized Flange Top
- 2. 30092 Over Sized Flange Bottom
- 3. 30234 Mounting Screw (2)

Fits behind an existing Woodford Faucet flange to secure a loose fitting faucet or cover a larger opening in the wall.



RK-65 MODEL 60 / 65 / 67 / 68 \$64.95 CHROME 5. 50251 "C" Washer RK-65-BR 6. 51014 Yoke Nut 1.50009 Tee key 7. 50250 Plunger 2. 50264 Head Nut 3. 50252 Stem Washer 4. 55062 Stem Screw Operating Rod Not Included

MODEL 68 DOOR RK-68DR \$66.25 CHROME 1. 30139 Tee Key Lock 2. 30156 Tee Key Lock Disc Spring 3. 30140 Tee Key Lock Well 4. 30143 Cam Lock 5. 30150 Cam Screw 6. 30155 Hex Nut 7. 50280 SS Head Cover 8. 50041 Headless Shoulder Bolt (2)

DOOR ASSEMBLY REPAIR KITS

RK-65DR*	B65 Flat Door-Chrome	170.20
RK-65DR-BR*	B65 Flat Door-Brass	136.15
RK-67DR*	B67 Bubble Door-Chrome	136.15
RK-67DR-BR*	B67 Bubble Door-Brass	136.15
RK-24DR	B24 Flat Door-Chrome	230.45
RK-24DR-BR	B24 Flat Door-Brass	230.45
RK-26DR	B26 Bubble Door-Chrome	271.10
RK-26DR-BR	B26 Bubble Door-Brass	271.10

All door assemblies include: (1) Door,

(1) E Ring, (1) Door Lock Screw, (2) Hinge Pins

MODULAR DOOR & FASCIA ASSEMBLIES

RK-30MBDR*	MB30 Composite	63.50
RK-24MBDR*	MB24 Stainless Steel	166.20

All modular door assemblies include: (1) Door, (1) Fascia, (1) Hinge Rod, (2) Hinge Screws, (2) Hinge Washers, (1) Spring

*Optional: Key (K) Cylinder Lock (Add 34.050 to List)

Note: Original unit must have -K on B65/B67


RK-70

MODEL 70 & 72 WALL HYDRANT-CHROME Obsolete Models 7/8/80/85/90/95

1. 50009 Tee key 2. 30109 Packing Nut 3. 30247 Packing

6. 50027 Support Washer 7. 51013 Ball Valve Rubber

\$71.70



RK-24

MODEL 21/24/B24/26/B26/Y24/ \$29.65 Y26/V26/40 CHROME



- 1. 30121 Handle Screw
- 2. 30120 Wheel Handle
- 3. 30109 Packing Nut
- 4. 30247 EPDM Packing
- 5. 30105 Packing Washer
- 6. 30104 Operating Screw
- 7. 30008 Valve Seat Rubber
- 8. 30009 Retainer Screw

RK-75 MODEL 75/B75/79/B79 **CLOSE COUPLED WALL HYDRANT**

\$62.15 **CHROME**

- 1. 50009 Tee key
- 2. 30109 Packing Nut
- 3. 30247 Packing
- 4. 55183 Head Nut Assy. (1 29/32" O.A.L.)



RK-71

MODEL 71/74/76/81/84/86 B71/B74/B76 **CLOSE COUPLED WALL HYDRANT**

CHROME

- 1.50009 Tee key
- 2. 30109 Packing Nut
- 3. 30247 Packing
- 4. 55177 Head Nut Assy. (2 1/4" O.A.L.)



RK-HC

MODEL HC/HCB HOT & COLD WALL HYDRANT

\$108.55

1. 51092 O-Ring AS-110 2. 51093 O-Ring AS-023

3. 50529 Packing Support Washer

4. 50502 Gasket (2)





RK-40HT

MODEL 40HT HALF TURN

\$5.90

\$63.90

- 1. 30247 Packing
- 2. 30105 Packing Washer
- 3. 30008 Valve Seat Washer
- 4. 30009 Seat Rubber Screw

Stem Screw Not Included

RK-40SC

MODEL 40SC SELF CLOSE

\$4.95

- 1. 30523 Head Nut Gasket
- 2. 30520 O-Ring (2)
- 3. 30526 Retaining Pin 4. 30008 Valve Seat Rubber
- 5. 30009 Seat Rubber Screw Stem Screw Not Included



RK-Y34HA

- 15004 Y34 Head
- 10104 Rod Stem 10100 Packing Nut

- 10101 Packing 10102 Support Washer 10011 Reducing Coupling
- 10206 Hex Nut (3)
- 8. 10009 Upper Link


RK-Y1HA

- 15002 Y1 Head 10100 Packing Nut
- 10101 Packing
- 10102 Packing Support Washer 10104 Brass Rod Stem
- 10011 Reducing Coupling 10206 Hex Nut (3)
- 10009 Upper Link

- 15007 Lower Link (Includes Item 11)
- \$142.45
- 10. 10019 Set Screw (2) 11. 15008 Cam & Clevis Assembly
- 12. 10020 Link Bolt (2) 13. 10021 Lever Bolt
- 13. 10021 Level Boil
 14. 10008 Lever
 15. 10004 3/4" Brass Hose Nozzle
 Head Casting #106

\$173.15

- 9. 15007 Lower Link (Includes Item 11) 10. 10019 Set Screw (2) 11. 15008 Cam & Clevis Assembly
- 10020 Link Bolt (2)
- 13. 10021 Lever Bolt
- 14. 10008 Lever 15. 10007 1" Brass Hose Nozzle
 - Head Casting #105

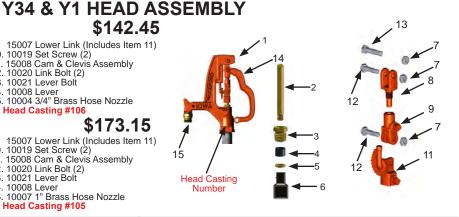

RK-Y34

MODEL Y34 YARD HYDRANT Head Casting #106

\$23.45





RK-YHL

MODEL Y1/Y2/Y34 YARD HYDRANT LINKS

\$36.55

- 1. 10206 Hex Nut (3)
- 2. 10009 Upper Link (orange)
- 3. 15007 Lower Link Assy. (orange)
- 4. 15008 Cam & Clevis Assy. (orange)
- 5. 10020 Link Bolt (2)
- 6. 10021 Lever Bolt

RK-SHL

MODEL S3 SANITARY YARD HYDRANT LINKS

\$37.75

- 1. 10206 Hex Nut (3) 4. 15241 Cam & Clevis Assy. (blue) 2. 10444 Upper Link (blue) 5. 10020 Link Bolt (2)
- 3. 15211 Lower Link Assy. (blue)
 - 6. 10021 Lever Bolt

RK-RHL

MODEL RHY1/RHY2 **ROOF HYDRANT LINKS**

\$36.55

- 1. 10206 Hex Nut (3)
- 2. 10614 Upper Link (bronze)
- 3. 15242 Lower Link Assy. (bronze)
- 4. 15243 Cam & Clevis Assy. (bronze)
- 5. 10020 Link Bolt (2)
- 6. 10021 Lever Bolt

RK-W34 RK-X34

W34 YARD HYDRANT (ORANGE HEAD) X34 YARD HYDRANT (BLUE HEAD)

\$38.75 \$38.75








4. 10101 Packing ◆ 5. 10102 Support Washer




RK-WXL \$15.75 MODEL W34/X34



RK-R34

R34 YARD HYDRANT

\$33.95



OTHER YARD HYDRANT **FULL HEAD ASSEMBLIES**


\$116.00 RK-X34HA


RK-W34HA \$125.70 \$68.85

RK-R34HA

WOODFORD







MODEL 10					
PART#	DESCRIPTION	PRICE			
10112	Handle Screw	1.20			
10113	Stem Screw	43.50			
50023	Wheel Handle	3.15			
50024	Packing	3.15			
50064	Support Washer	2.20			
74506	Packing Support Washer	1.55			
74528	Valve Seat Rubber	1.05			
74529	Retainer	27.40			
74530	Retainer Screw	1.20			
74532	Yoke Nut	15.95			
74533	Packing Nut	5.15			
74541	Valve Stem Assy. 4" WT-6 3/4 OAL	51.05			
74542	Valve Stem Assy. 6" WT-8 3/4 OAL	53.90			
74543	Valve Stem Assy. 8" WT-10 3/4 OAL	56.80			
74544	Valve Stem Assy. 10" WT-12 3/4 OAL	59.90			
74545	Valve Stem Assy. 12" WT-14 3/4 OAL	62.80			
74546	Valve Stem Assy. 14" WT-16 3/4 OAL	65.80			
74547	Valve Stem Assy. 18" WT-20 3/4 OAL	71.85			
74548	Valve Stem Assy. 24" WT-26 3/4 OAL	80.55			

MODEL 12					
PART#	DESCRIPTION	PRICE			
30002	Handle Screw	1.20			
30005	Packing	3.30			
30009	Retaining Screw	1.20			
30107	Packing Nut, Brass	6.30			
74506	Packing Support Washer	1.15			
74509	Valve Seat Rubber	2.20			
74513	Wheel Handle	14.95			
74517	Rod Assembly 6" WT - 8 1/8 OAL	43.45			
74518	Rod Assembly 8" WT - 10 1/8 OAL	46.30			
74519	Rod Assembly 10" WT - 12 1/8 OAL	49.50			
74520	Rod Assembly 12" WT - 14 1/8 OAL	52.25			
74521	Rod Assembly 14" WT - 16 1/8 OAL	55.20			
74522	Rod Assembly 18" WT - 20 1/8 OAL	61.25			
74531	Rod Assembly 24" WT - 26 1/8 OAL	70.20			
NACE NACE This language OAL Overell Legarth					

WT = Wall Thickness, OAL = Overall Length (3/8" Diameter Rod - 16 Splines)

WT = Wall Thickness, OAL = Overall Length (5/16" Diameter Valve Stem Rod)





PART#	MODEL 7 DESCRIPTION	PRICE
50078	Head (Chrome)	43.85

	MODEL 8	
PART #	DESCRIPTION	PRICE
50078	Head (Chrome)	43.85
50079	Head (brass)	43.85

MODELS 77 & 78

All parts available except deep box castings - Parts same as Y70 Hydrant or Model 70 and 80.



Model 80 Woodford Freezeless



Model 85 Woodford Freezeless Anti-Contamination 34HW Vacuum Breaker (55180 Nozzle Required)



Model 90 Woodford Freezeless



Model 95 Woodford Freezeless Anti-Contamination 34HW Vacuum Breaker (55180 Nozzle Required)

WOODFORD

PART	DESCRIPTION	WHERE USED	PRICE	PART	DESCRIPTION	WHERE USED	PRICE
10004	Hose Nozzle, 3/4"	Y34, Y1, W34, X34, R34	7.40	30512	Packing Nut w/Stem Gd.	14, 17	6.25
10007	Hose Nozzle, 1"	Y34, Y1, W34, X34, R34	28.20	30559	Oval Handle	19	4.40
10008	Lever	Y34, Y1, Y2	18.95		EPDM Packing	14, 17, 19, 22, V22	3.95
10009	Link, Upper	Y34, Y1, Y2	7.85	30565	C - Plug Button-large	29	1.45
10011	Coupling	Y34, Y1, Y2, W34	7.65		H - Plug Button-large	29	1.45
10018	Valve Body	W34, X34, Y30, Y34, Y70, Y95	35.70	35280	Drain Valve Assembly	20, 25, 27	4.85
10020	Bolt Bolt	Y34, Y1, Y2 Y34, Y1, Y2	1.90 1.90	35504 35506	Repl. Assy. 4" Wall Repl. Assy. 6" Wall	20, 25, 27 20, 25, 27	48.45 49.05
	Packing Nut	Y34, Y1, Y2, W34	4.30		Repl. Assy. 8" Wall	20, 25, 27	50.25
10101	Packing	Y34, Y1, Y2, W34	2.55	35510	Repl. Assy. 10" Wall	20, 25, 27	51.10
10102	Washer	Y34, Y1, Y2, W34	2.45		Repl. Assy. 12" Wall	20, 25, 27	52.00
10103	Rod Stem	Y34, Y1	4.10	35720	Rod Assy. 4" Wall	14,17,22,V22 (6" OAL w/ check)	11.90
10104	Rod Stem	Y34, Y1, Y2, W34	3.15		Rod Assy. 6" Wall	14,17,22,V22 (8" OAL w/ check)	12.65
10105	Plunger	Y30, Y34, Y70, Y95, W34	12.20	35722	Rod Assy. 8" Wall	14,17,22,V22 (10" OAL w/ chk)	13.75
10106	Plunger	Y1, Y2	15.60	35723	Rod Assy. 10" Wall	14,17,22,V22 (12" OAL w/ chk)	14.65
10107	Plunger, 7/16-20 Thread	X34 - Yellow Head	10.50	35724	Rod Assy. 12" Wall	14,17,22,V22 (14" OAL w/ chk)	15.40
10108	Plunger, 3/8-16 Thread	X34 - blue head, R34	11.35	35725	Rod Assy. 14" Wall	14,17,22,V22 (16" OAL w/ chk)	16.45
10109	Yoke Nut	Y30, Y70, Y95	15.00	50009	Tee Key, Short - 1 3/4"	5/16" Square Stem	3.30
10206	Hex Nut	Y34, Y1, W34, X34	1.70		Tee Key, Long - 3 1/4"	5/16" Square Stem	5.10
10630	Metal Oval Whl. Hdl.	RHMC, Y30	11.80	50012	Tee Key, Long - 3 1/4"	8 Pt. Spline-14,16,17,19,22,V22	5.10
10633	Metal Oval Whl. Hdl.	Wheel Handle Utility Hydrants	12.65	50023	Wheel Handle	Y30	3.15
15001	Head Assembly Page 23		RK-Y1HA	50024	Packing	All WH, Y70, Y95, Y30	3.15
	Head & Nozzle	Y1	83.40		Washer	32, 70	4.25
15003 15004	Head Assembly Page 23 Head & Nozzle	Y34 Y34	RK-Y34HA 70.65	50028 50040	Nut Door Hinge Pin	32, 70 All Wall Hydrant Boxes	1.35 1.75
15004	Link, Lower	Y34, Y1	6.70	50250	Plunger	All Auto Drain Hydrants	11.65
15007	Cam & Clevis Assy	Y34, Y1	13.10	50250	"C" Washer	All Auto Drain Hydrants	3.90
15000	Clevis & Set Screw	Y34, Y1	9.35	50251	Stem Washer	All Auto Drain Hydrants	2.45
15003	Head & Nozzle	X34	64.50		Head Nut, Chrome	All Auto Drain Hydrants	16.10
15037	Head Assembly	X34	RK-X34HA	50502	Gasket (2 Reg)	HC Series	3.80
15039	Head Assy., Complete	W34	RK-W34HA	51013	Valve Rubber	70, 72	5.40
15040	Head & Nozzle	W34	65.95	51014	Yoke Nut	All Freezeless WH	11.10
15050	Pivot Assembly	W34, X34	8.65	51117	Door Lock Screw Ch	All Wall Hydrant Boxes	11.70
15220	Diverter	S3, S4H	31.70	51120	Door Lock Screw E-Ring	All Wall Hydrant Boxes	2.60
15238	Diverter	Y2	31.70	55062	Stem Screw	All Auto Drain Hydrants	19.75
15246	Head & Nozzle	R34	30.95	55079	Shuttle Housing Assy.	HC Series	47.90
15247	Head Assembly	R34	68.65		Yoke Nut Assembly	All Non-Freeze Area WH	13.90
30002	Handle Screw, Br.	14,17,24/26 Series Y30	1.20		Head Nut Assy., Br	All WH, Y70, Y95	31.05
30006	Packing Washer	14, 22, V22	2.45		Head Nut Assy., Ch	All WH, Y70, Y95	37.20
30008	Valve Rubber	14,17,19,22,V22, 24/26 Series	2.00		Head Nut Assy., Br	Y30	19.90
	Screw	14,17,19,22,V22, 24/26 Series	1.20		Head Nut Assy., Br	75, B75, 79, B79	31.10
	Nut, Br	14, 17	4.15		Head Nut Assy., Ch	75, B75, 79, B79	32.25
	Wheel Handle-metal	14, 17	4.10		Operating Rod Assy.	Auto. Drain (6 5/16 OAL)	34.65
30104 30105	Stem Washer	24/26 Series 24/26 Series	8.80 2.15		Operating Rod Assy. Operating Rod Assy.	Auto. Drain (8 5/16 OAL) Auto. Drain (10 5/16 OAL)	35.35 36.05
30103	Packing Nut, Brass	24/26, WH, Y30 Series	6.30	55410	Operating Rod Assy.	Auto. Drain (12 5/16 OAL)	37.25
	Packing Nut, Chrome	24/26, WH Series	8.90		Operating Rod Assy.	Auto. Drain (14 5/16 OAL)	38.20
30120	Wheel Handle, Clear	24/26 Series	2.30		Hose Nozzle Br	20, 22, V22, 60	10.15
30121	Screw, Nickel	24/26 Series, HC67, Y30	1.90		Nozzle W/o-ring, Brass	21, 70, Y70	7.35
30230	Plunger Assembly	20, 25, 27	5.20		Nozzle W/o-ring, Ch.	70, 71, B71, 81	8.85
30233	Wheel Handle, Tan	24/26 Series	2.00		Packing Nut	Thermaline	5.45
30234	Handle Screw	20, 25, 27	2.20	80008	Packing Ring	Thermaline	3.35
30236	Drain Guard	20, 25, 27	1.25	80013	Handle, Brass	Thermaline	15.70
30238	Stem Screw	20, 25, 27	2.70	80055	Cover, Woodford	Thermaline	5.20
	Wheel Handle, Metal	20, 25, 27	3.30		Cover, Thermaline	Thermaline	5.20
30241	Head Nut, Br	20, 25, 27	23.35	80061	Heater Cover	Thermaline	1.60
	Head Nut Gasket	25	1.80		Heater. Well Thumb Nut	Thermaline	3.40
30247	Packing	24/26 Series, B24	3.95		Heater Well Washer	Thermaline	2.45
30304	Operating Rod 4"	20, 25, 27	2.45		Yoke Nut	Thermaline	12.85
30306	Operating Rod 6"	20, 25, 27	3.40	80068	Wing Nut	Themaline	1.55
30308	Operating Rod 10"	20, 25, 27	4.30		Carriage Bolt	Thermaline	1.70
30310 30312	Operating Rod 10" Operating Rod 12"	20, 25, 27 20, 25, 27	5.20 6.25	85001 85002	Heater Well Assy., 1' Heater Well Assy., 2'	Thermaline Thermaline	12.40 13.10
30421	Packing Washer	17	2.45	85015	Valve Assembly	Thermaline	9.10
30462	C - Plug Button-small	22, V22	1.45		Heater, 1'	Thermaline	52.95
	H - Plug Button-small	22, V22	1.45		Heater, 2'	Thermaline	52.95
	U	L .			· · · · · · · · · · · · · · · · · · ·	L.	



TERMS AND CONDITIONS OF SALE

Selling Policy - Possession of our price list or jobber discounts is not an offer to sell. All orders are subject to acceptance by the home office in Colorado Springs, Colorado.

Minimum Invoice - No invoice will be rendered for less than \$25.00 list.

Cash Discount - 3% 15 days from date of invoice or 2% 10th Prox., Net EOM

Freight Allowance - All goods sold F.O.B shipping point. For shipments in the continental United States and Canada, <u>full freight will be allowed on orders of \$3,500.00 or more list.</u> No freight allowance on smaller shipments. We reserve the right to ship the most economical way. Non-Standard lengths might not qualify for FFA.

Foreign Shipments - (including **Alaska** and **Hawaii**) will be allowed full freight, according to the conditions listed above, to the embarkation point in the continental United States only.

Claims, Shortages and Damage - All claims for shortages or goods damaged in transit must be made within 10 days after receipt of merchandise. All claims must be made to Woodford Manufacturing Co., LLC by the consignee.

Prices, Designs and Quotation - Prices, designs and dimensions of products are subject to change without notice. Quotations, unless otherwise stated, are for immediate acceptance and prices quoted are based on the sellers standard tolerances of materials. We reserve the right to invoice all merchandise at prices in effect at the time of shipment.

Cancellations - Orders covering special merchandise are not subject to cancellation without our written permission. Purchaser subject to expense incurred by cancellation of special orders.

Limited Warranty - All goods are sold with a limited warranty for one year against defects in material and workmanship. We will replace or issue credit (at our option) for defective goods that are returned for inspection and found to be defective within one year of purchase from Woodford.

Implied warranties - Implied warranties are limited to one year from date of purchase from Woodford.

Taxes and Government Regulations - Sales or manufactures tax imposed under any existing or future statutes shall be added to the price of merchandise effective at the time shipment is made.

Ordering Procedure - Purchase order must include the following: Model number, inlet size & type, handle type, wall thickness or depth of bury and type of finish required where applicable.

Returned Goods - Standard catalog material may be returned. All returns of resalable new and unused product is subject to a 25% restocking charge, plus the cost of reconditioning, not to exceed an additional 25% (50% total). Credit for used or freight damaged material to be determined by factory upon receipt of material. Polished Brass Finishes PB are subject to 50% restocking charge.

We will not accept returns for:

- Any non-defective return under \$25.00 net or product over 18 months old.
- 2. Special lengths on any product.
- Obsolete merchandise and product not listed in current price guide.
- 4. Competitor's product or product abused by installation.
- Items not reviewed and RGA form signed by local Woodford representative before being sent back for factory approval.

All items claimed defective must be returned prepaid to address shown on back cover:

Model 19 Limited 5 Year Warranty



www.woodfordmfg.com

All Model 19 Wall faucets are sold with a limited warranty for five (5) years against defects in material and workmanship. We will replace or issue credit (at our option) for defective goods that are returned for inspection and found to be defective within five (5) years of purchase from Woodford. In addition, Woodford will pay up to \$5,000.00

toward the cost to repair damages incurred as a result of a defective Model 19 Wall Faucet that was properly installed. This limited warranty does not cover defects caused by: modification, alteration or repair of the product by anyone other than Woodford; physical abuse to, or misuse of, the product or operation thereof in a manner contrary to accompanying instructions.

Commercial Limited 5 Year Warranty



All Commercial Wall hydrants and Roof hydrants shown in this brochure are sold with a limited warranty for five years against defects in material and workmanship. We will replace or issue credit (at our option) for defective goods that are returned for inspection and found to be defective within five years of purchase from Woodford.

Patented and Patents Pending: See https://www.woodfordmfg.com/patents for details For Individual Spec Sheets, Installation and Troubleshooting Instructions Go to https://www.woodfordmfg.com or Call Customer Service 1-800-621-6032



To locate a Woodford Representative in your area please contact our sales department Toll Free (800) 621-6032



WOODFORD MANUFACTURING COMPANY, LLC 2121 Waynoka Road, Colorado Springs, CO 80915 USA Phone (719) 574-1101 Toll Free (800) 621-6032 https://www.woodfordmfg.com